



ALBANY CALIFORNIA

SEWER LATERAL SPECIFICATIONS FOR A TYPICAL DWELLING SERVED BY A MAIN SEWER IN THE STREET

The City of Albany requires property owners to install a two-way, sanitary sewer cleanout, as illustrated below when replacing the upper sewer lateral.


A licensed plumbing contractor will typically install the cleanout and upper sewer lateral. Before the installation construction begins, the contractor must first obtain a Plumbing and / or an Encroachment Permit from the Community Development Department.

As of February 1, 2015, Albany has joined the East Bay Municipal Utility District (EBMUD) Private Sewer Lateral (PSL) Program. Upper sewer lateral replacements now require both City and EBMUD permits and inspections. Please visit www.eastbypsl.com for more EBMUD PSL program information.

The sewer system will be tested by the contractor per the City's specifications and inspected by City and EBMUD staff.

**ALLOW 24 HOURS FOR A CITY INSPECTION, FROM THE TIME OF REQUEST:
CALL (510) 528-5760 TO SCHEDULE A CITY INSPECTION.**

If you have technical questions regarding City upper sewer lateral requirements, please call the Building Inspector at (510) 528-5760.

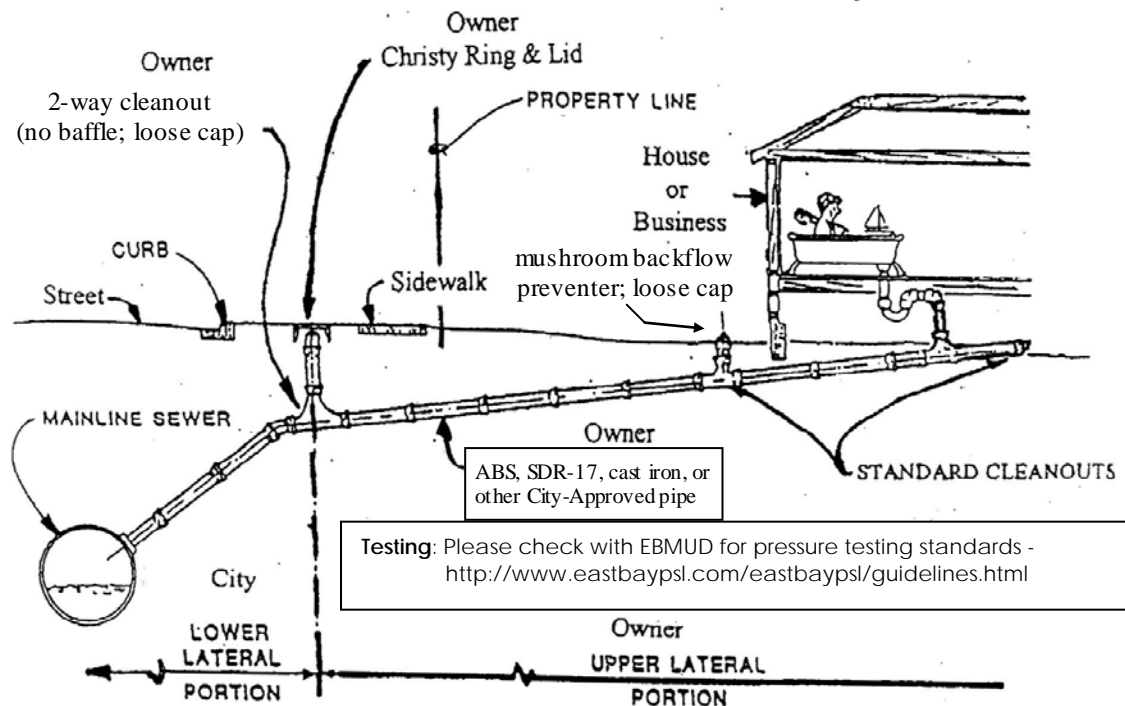

NOTE: Cleanouts and portions of sewer lines underneath a driveway or driveway approach must be cast iron.